




Switch Tip

FEATURES INCLUDE

- Compact rugged construction
- Accepts all sizes of shock tube
- 10,000+ shots reliability
- Red dot safety indicator
- Unit can be recalibrated for wear
- Firing sequence can be safed by opening handle
- Side viewing port for easy loading
- Easy to calibrate
- The most reliable shock tube firing tip in the world
- Guaranteed for life

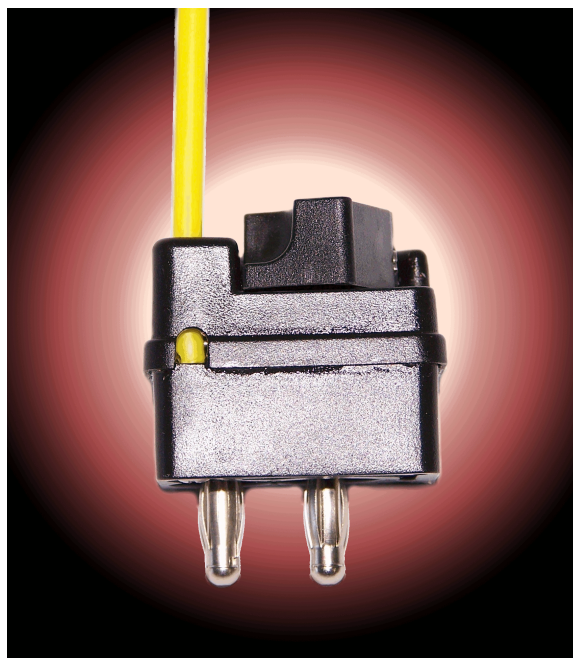

Specifications for Switch Tip

Size (LxWxH):	1.25" x 1.2" x 1.55"
Weight:	0.075 Lbs (1.2 oz., 34g)
Power Requirement:	ESI series of shock tube initiators
Maintenance:	Simple one-screw adjustment suggested every 1,500 shots
Shock Tube Tip:	Accepts military, standard, commercial, and mini shock tube (0.100" ~ 0.086")
Environmental:	Resists ingress of debris such as dirt, dust, and rain
Safety:	Red dot indicates FIRE position. Unit can be safed by opening handle.
Operational Temperature Range:	-40°C ~ +85°C
Ordering Information:	ESITIP

This product is covered under one or more U.S. Patents